
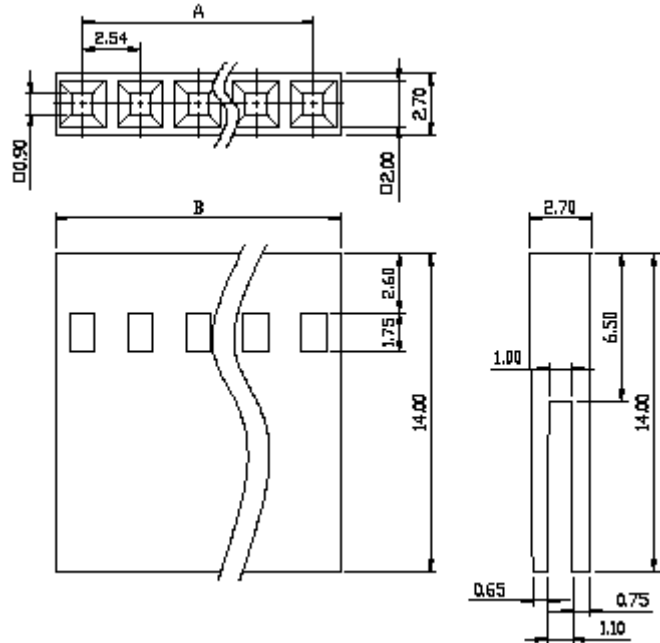
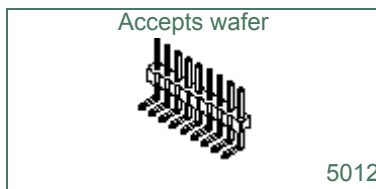
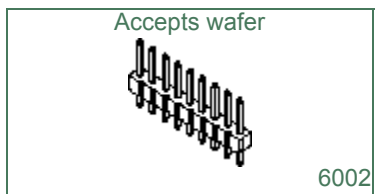


## 2.54mm F.P.C. Housing

- • HOUSING PART NO:3803H

- Material:  
Contact Pin: Phosphor Bronze  
Base: Nylon 66 UL 94V-0
- Pitch: 2.54mm
- Accepts Terminal: 3803PS-2



Drawing

CIRCUITS	PART NO.	DIMENSION	
		A	B
2	3803H-02	2.54	4.93
3	3803H-03	5.08	7.47
4	3803H-04	7.62	10.01
5	3803H-05	10.16	12.55
6	3803H-06	12.70	15.09
7	3803H-07	15.24	17.63
8	3803H-08	17.78	20.17
9	3803H-09	20.32	22.71
10	3803H-10	22.86	25.25
11	3803H-11	25.40	27.79
12	3803H-12	27.94	30.33
13	3803H-13	30.48	33.87
14	3803H-14	33.02	35.41
15	3803H-15	35.56	37.95
16	3803H-16	38.10	40.49
17	3803H-17	40.64	43.03
18	3803H-18	43.18	45.57
19	3803H-19	45.72	48.11
20	3803H-20	48.26	50.65
21	3803H-21	50.80	53.19
22	3803H-22	53.34	55.73
23	3803H-23	55.88	58.27
24	3803H-24	58.42	60.81

### SPECIFICATIONS

- Current rating: 3A AC, DC
- Voltage rating: 250V AC, DC
- Current resistance: 20m  $\Omega$  max.
- Insulation resistance: 1,000m  $\Omega$  min
- Withstand voltage: 1,500 AC/minute
- Temperature range: -40°C~+105°C